


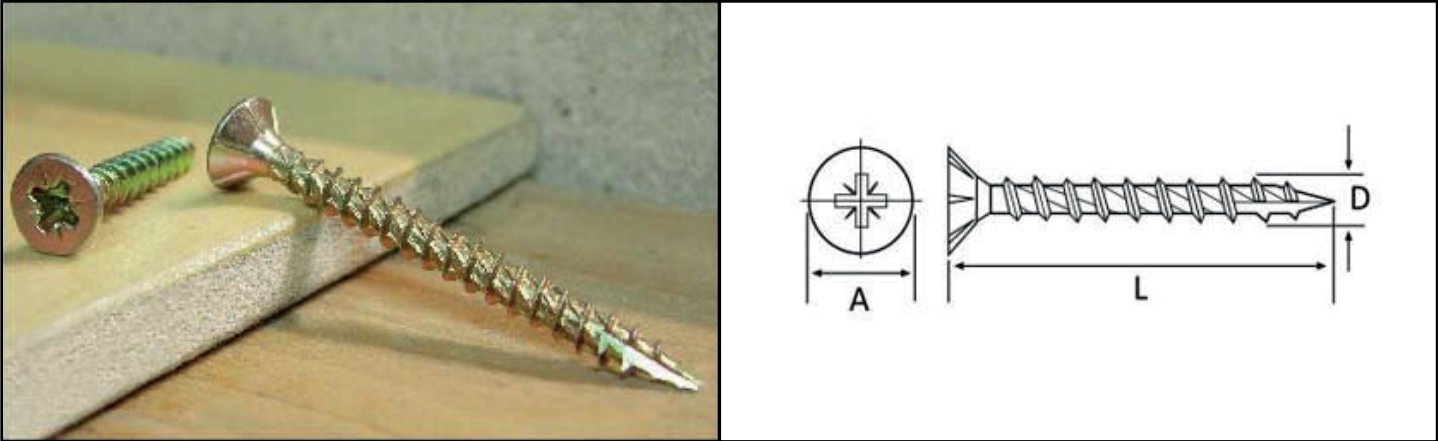

TORNILLO TURBO SCREW

| Código | Diámetro | Largo<br>"L" | Envase | Diámetro<br>Cabeza<br>"A" | Diámetro<br>Rosca "D" | # Punta<br>Pozidrive | Altura<br>Cabeza<br>"H" |
|--------|----------|--------------|--------|---------------------------|-----------------------|----------------------|-------------------------|
|--------|----------|--------------|--------|---------------------------|-----------------------|----------------------|-------------------------|

Zincado Iridiscente

|        |          |           |   |   |      |     |   |      |
|--------|----------|-----------|---|---|------|-----|---|------|
| 01TMTS | #5[3.0]  | 12        | 1 | G | 6.0  | 3.0 | 1 | 2,46 |
| 02TMTS |          | 16        |   |   |      |     |   |      |
| 03TMTS |          | 20        |   |   |      |     |   |      |
| 04TMTS |          | 25        |   |   |      |     |   |      |
| 11TMTS | #6[3.5]  | 20        | 1 | G | 7.0  | 3.5 | 2 | 2,93 |
| 12TMTS |          | 25        |   |   |      |     |   |      |
| 13TMTS |          | 30        |   |   |      |     |   |      |
| 14TMTS |          | 35        |   |   |      |     |   |      |
| 15TMTS |          | 40        |   |   |      |     |   |      |
| 16TMTS |          | 45        |   |   |      |     |   |      |
| 17TMTS |          | 50        |   |   |      |     |   |      |
| 18TMTS | #8[4.0]  | 20        | 1 | G | 8.0  | 4.0 | 2 | 3,18 |
| 19TMTS |          | 25        |   |   |      |     |   |      |
| 20TMTS |          | 30        |   |   |      |     |   |      |
| 21TMTS |          | 35        |   |   |      |     |   |      |
| 22TMTS |          | 40        |   |   |      |     |   |      |
| 23TMTS |          | 45        |   |   |      |     |   |      |
| 24TMTS |          | 50        |   |   |      |     |   |      |
| 25TMTS |          | 70        |   |   |      |     |   |      |
| 27TMTS | #9[4.5]  | 30        | 1 | G | 9.9  | 4.5 | 2 | 3,55 |
| 28TMTS |          | 35        |   |   |      |     |   |      |
| 29TMTS |          | 40        |   |   |      |     |   |      |
| 31TMTS |          | 50        |   |   |      |     |   |      |
| 32TMTS |          | 60        |   |   |      |     |   |      |
| 33TMTS |          | 70        |   |   |      |     |   |      |
| 46TMTS |          | 90/60 **  |   |   |      |     |   |      |
| 38TMTS | #10[5.0] | 50        | 1 | G | 10,0 | 5.0 | 2 | 3,96 |
| 39TMTS |          | 60        |   |   |      |     |   |      |
| 40TMTS |          | 70/60 **  |   |   |      |     |   |      |
| 45TMTS |          | 90/60 **  |   |   |      |     |   |      |
| 41TMTS | #14[6.0] | 80/60 **  | 1 | G | 12,0 | 6.0 | 3 | 4,85 |
| 42TMTS |          | 100/60 ** |   |   |      |     |   |      |
| 43TMTS |          | 120/72 ** |   |   |      |     |   |      |
| 44TMTS |          | 140/72 ** |   |   |      |     |   |      |

Ruspert 1000 horas

|         |          |          |   |   |      |     |   |      |
|---------|----------|----------|---|---|------|-----|---|------|
| R17TMTS | #6[3.5]  | 50       | 1 | G | 7,0  | 3,5 | 2 | 2,93 |
| R25TMTS | #8[4.0]  | 70       |   |   | 8,0  | 4,0 | 2 | 3,18 |
| R45TMTS | #10[5.0] | 90/60 ** |   |   | 10,0 | 5,0 | 2 | 3,96 |

(\*) G=Gruesa=144 piezas

\*\* Segunda cota corresponde a longitud de rosca