


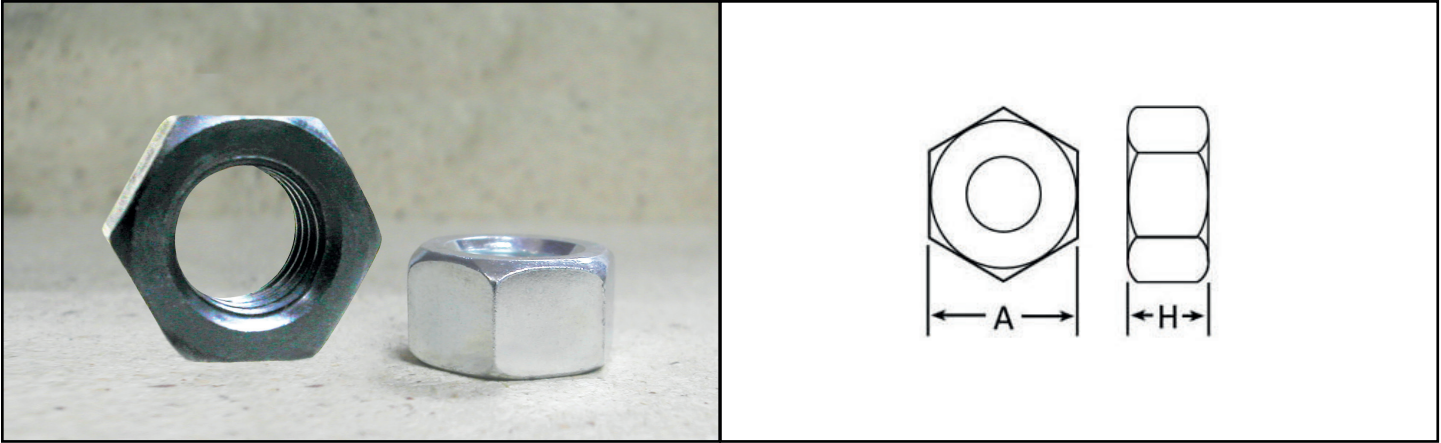

TUERCA HEXAGONAL UNC GRADO 2

Código	Diámetro	Envase	Entre Caras "A" pulg-mm	Altura, mm Tuerca "H"	Carga de Prueba**, kg
--------	----------	--------	----------------------------	--------------------------	--------------------------

Pavonado

201TH1-G	1/4-20	1.000	U	7/16 - 11.1	5.5	1290
202TH1-G	5/16-18	500	U	1/2 - 12.7	6.7	2120
201TH1	1/4-20	100	U	7/16 - 11.1	5.5	1.290
202TH1	5/16-18	100	U	1/2 - 12.7	6.7	2.120
203TH1	3/8-16	100	U	9/16 - 14.2	8.3	3.170
204TH1	7/16-14	100	U	11/16 - 17.4	9.5	4.320
205TH1	1/2-12	100	U	3/4 - 19.0	11.1	N/E *
206TH1	1/2-13	100	U	3/4 - 19.0	11.1	5.790

Sin Recubrimiento

207TH1	9/16-12	25	U	7/8 - 22.2	12.3	7.420
208TH1	5/8-11	25	U	15/16 - 23.8	13.8	9.190
209TH1	3/4-10	25	U	1.1/8 - 28.5	16.2	13.630
210TH1	7/8-9	10	U	1.5/16 - 33.3	19.0	18.840
211TH1	1"-8	10	U	1.1/2 - 38.1	21.8	24.680
212TH1	1 1/4-7	10	U	1.13/16 - 46.0	27.3	N/E *
213TH1	1 1/2-6	10	U	2.3/16 - 55.5	33.2	N/E *

Zincado Brillante

B201TH1-G	1/4-20	1.000	U	7/16 - 11.1	5.5	1290
B202TH1-G	5/16-18	500	U	1/2 - 12.7	6.7	2120
200TH1	3/16	100	U	11/32 - 8.7	5.0	N/E *
B201TH1	1/4-20	100	U	7/16 - 11.1	5.5	1.290
B202TH1	5/16-18	100	U	1/2 - 12.7	6.7	2.120
B203TH1	3/8-16	100	U	9/16 - 14.2	8.3	3.170
B204TH1	7/16-14	100	U	11/16 - 17.4	9.5	4.320
B205TH1	1/2-12	100	U	3/4 - 19.0	11.1	N/E *
B206TH1	1/2-13	100	U	3/4 - 19.0	11.1	5.790
B207TH1	9/16-12	25	U	7/8 - 22.2	12.3	7.420
B208TH1	5/8-11	25	U	15/16 - 23.8	13.8	9.190
B209TH1	3/4-10	25	U	1.1/8 - 28.5	16.2	13.630
B210TH1	7/8-9	10	U	1.5/16 - 33.3	19.0	18.840
B211TH1	1"-8	10	U	1.1/2 - 38.1	21.8	24.680

Galvanizado Mecánico

G203TH1	3/8-16	100	U	11/32 - 8.7	5.0	N/E *
G206TH1	1/2-13	100	U	3/4 - 19.0	11.1	5.790
G208TH1	5/8-11	25	U	15/16 - 23.8	13.8	9.190
G209TH1	3/4-10	25	U	1.1/8 - 28.5	16.2	13.630
G210TH1	7/8-9	10	U	1.5/16 - 33.3	19.0	18.840
G211TH1	1"-8	10	U	1.1/2 - 38.1	21.8	24.680

* N/E no evaluado

** Carga de prueba corresponde a 0.2 % antes de alcanzar el punto de fluencia.