


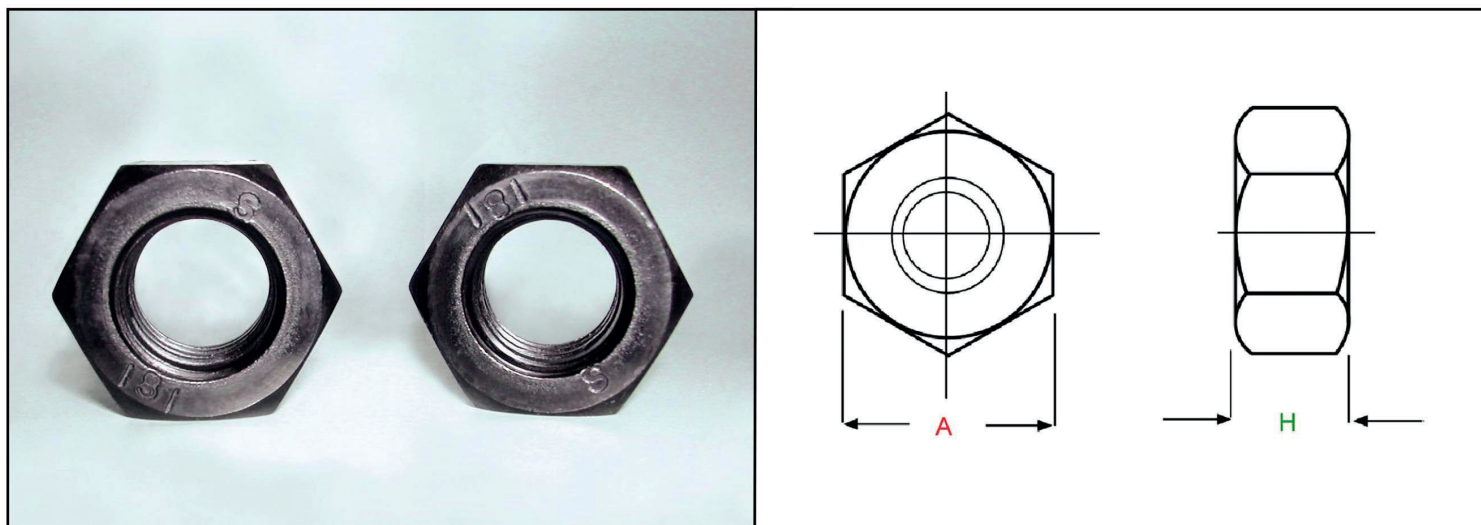

TUERCA HEXAGONAL ISO CLASE 8.8

Código	Diámetro	Envase	Entre Caras "A"	Entre Aristas "B"	Altura Cabeza "H"	Torque (N-m) Recomendado
--------	----------	--------	-----------------	-------------------	-------------------	--------------------------

Pavonado

13THM8	M5-0.8	100	U	8.0 - 7.8	9.2 - 8.8	4,5	5,9
01THM8	M6-1.0			10.0 - 9.8	11.6 - 11.1	5,00	10
02THM8	M8-1.25			13.0 - 12.7	15.0 - 14.4	6,50	25
03THM8	M10-1.50			16.0 - 15.7	18.5 - 17.8	8,00	49
05THM8	M12-1.75			18.0 - 17.7	20.8 - 20.0	9,50	85
11THM8	M14-2.00	25	U	21.0 - 20.7	24.38 - 23.4	11,00	135
09THM8	M16-2.00			24.0 - 23.7	27.7 - 26.8	14,80	210
12THM8	M18-2.50			27.0 - 26.6	30.6	15,00	300
10THM8	M20-2.50			30.0 - 29.2	34.6 - 33.0	18,00	425

ROSCA FINA

Pavonado

14THM8	M8-1.00	100	U				
04THM8	M10-1.25			16.0 - 15.7	18.5 - 17.8	8,0	42
06THM8	M12-1.50			18.0 - 17.7	20.8 - 20.0	9,5	76
07THM8	M14-1.50	25	U	21.0 - 20.7	24.38 - 23.4	11,0	120
08THM8	M16-1.50	25	U	24.0 - 23.7	27.7 - 26.8	14,8	180

Unidades no indicadas : milímetros.

