


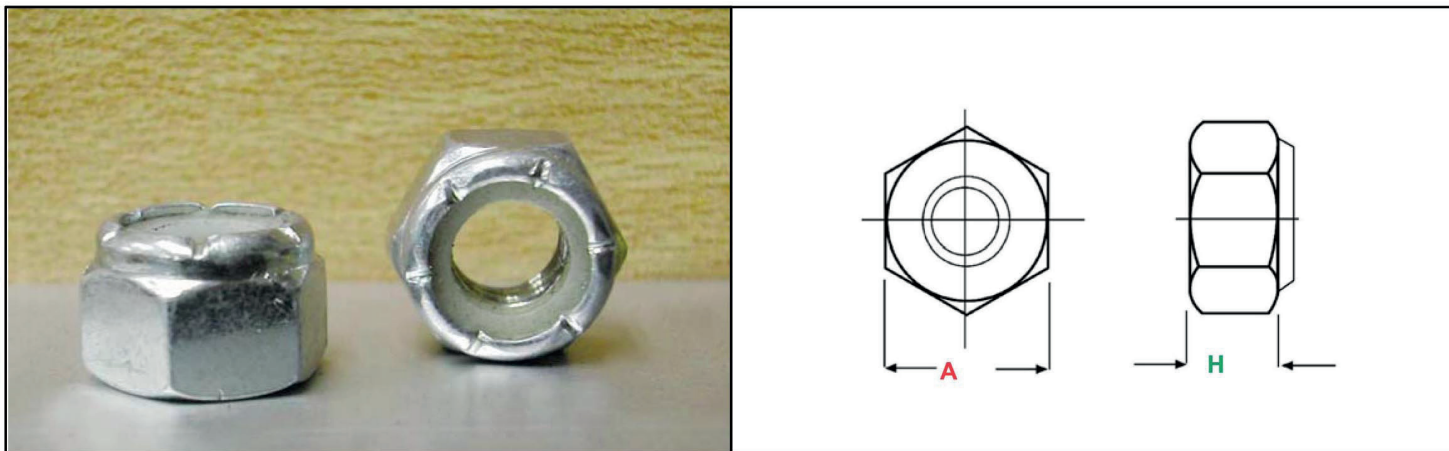

TUERCA HEXAGONAL UNC CON SEGURO DE NYLON UNC

Código	Diámetro	Envase	Entre Caras "A"	Altura Tuerca "H"	Carga de Prueba kg.
--------	----------	--------	-----------------	-------------------	---------------------

Zincado Brillante

01TSN	3/16-24	100	U	11/32 - 8.7	5.0	N/E *
02TSN	1/4-20	100	U	7/16 - 11.1	5.5	1.291
03TSN	5/16-18	100	U	1/2 - 12.7	6.7	2.129
04TSN	3/8-16	100	U	9/16 - 14.2	8.3	3.171
05TSN	1/2-13	100	U	3/4 - 19.0	11.1	5.798
06TSN	5/8-11	25	U	15/16 - 23.8	13.8	9.195
07TSN	3/4-10	25	U	1.1/8 - 28.5	16.2	13.635

* N/E no evaluado

TUERCA HEXAGONAL METRICA CON SEGURO DE NYLON MÉTRICA

Código	Diámetro	Envase	Entre Caras "A"	Altura Tuerca "H"	Carga de Prueba**, kg
--------	----------	--------	-----------------	-------------------	-----------------------

Zincado Brillante

201TSN	M6-1.0	100	U	10	5.0	1.170
202TSN	M8-1.25	100	U	13	6.4	2.160
203TSN	M10-1.50	100	U	17	8.0	3.420
205TSN	M12-1.75	100	U	19	10.0	5.140
206TSN	M12-1.50	100	U	19	10.0	N/E *

