


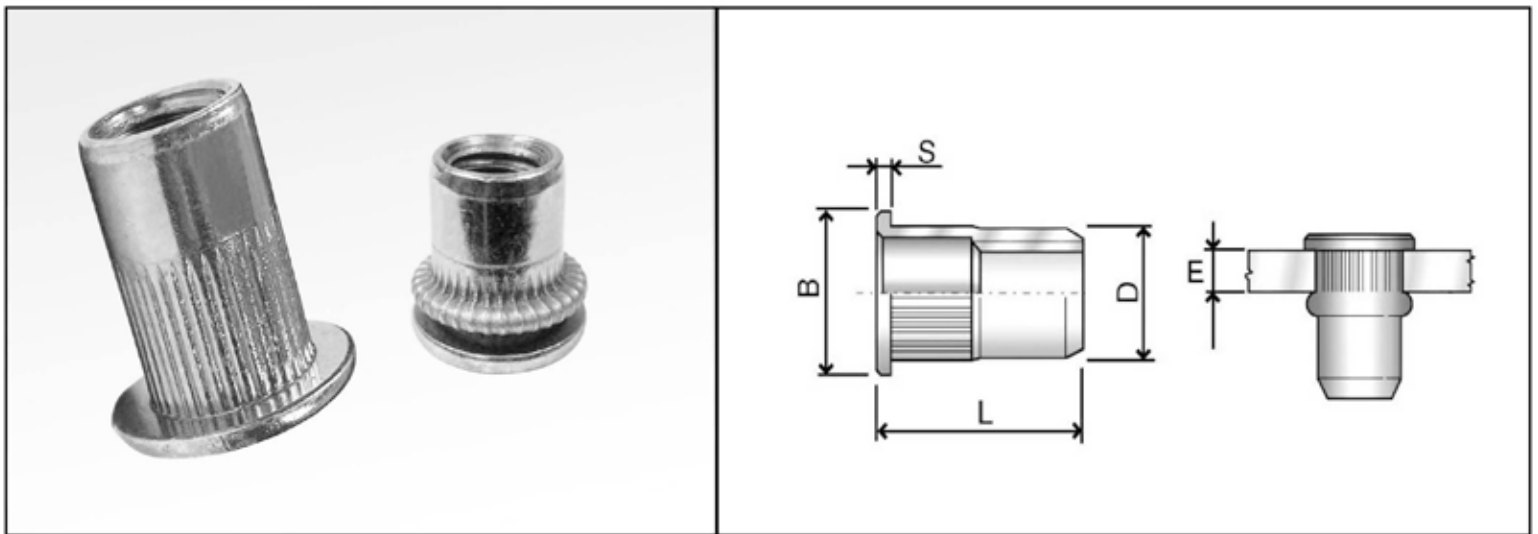

## TUERCAS REMACHABLES ACERO CARBONO (METRICA)

| Código | Descrip.   | Diám.<br>"D" mm | Envase<br>unid. | Diám.<br>"B"<br>mm | Altura<br>Cabeza<br>"S" mm | Rango de<br>Agarre, mm | Tracción<br>kg | Torque<br>Nm | Remachadora<br>adecuada |
|--------|------------|-----------------|-----------------|--------------------|----------------------------|------------------------|----------------|--------------|-------------------------|
| 05BRN  | M4 - 0.7   | 5,9             | 100             | 9                  | 0.8                        | 0.3 - 3.0              | 720            | 6            | HN02<br>SN06            |
| 01BRN  | M5 - 0.8   | 6,9             | 100             | 10                 | 1.0                        | 0.3 - 3.0              | 1,05           | 8            |                         |
| 02BRN  | M6 - 1.00  | 8.9             | 100             | 13                 | 1.5                        | 0.5 - 4.0              | 1,72           | 15           |                         |
| 03BRN  | M8 - 1.25  | 10.9            | 100             | 15                 | 1.5                        | 0.8 - 4.0              | 2,46           | 32           | SN10                    |
| 04BRN  | M10 - 1.50 | 12.9            | 50              | 19                 | 1.7                        | 1.0 - 5.0              | 3,05           | 50           |                         |

NOTA:

Diametro de la broca 0.1 mm mayor que Diametro "D"

Tracción y Torque son valores máximos

## TUERCAS REMACHABLES ACERO CARBONO

| Código | Nominal | Largo | Envase<br>Unid. |
|--------|---------|-------|-----------------|
|--------|---------|-------|-----------------|

Zincado Brillante

|        |         |       |     |
|--------|---------|-------|-----|
| 105BRN | #8-32   | 11.50 | 100 |
| 101BRN | #10-24  | 13.0  | 100 |
| 102BRN | 1/4-20  | 15.0  | 100 |
| 103BRN | 5/16-18 | 18.50 | 100 |
| 104BRN | 3/8-16  | 18.50 | 50  |